

building paper sisalkraft® 728

SISALKRAFT® 728

Description

Polythene coated heavy duty waterproof building paper.

Applications

1. DPM.
2. Concrete Slide/Separating Layer.
3. Lead Roof Underlay.

Technical:


Accreditation: BS1521/A1F

Water resistance: >24 hours

Roll specification: 1mx25m / 8kg/roll
1mx50m / 17kg/roll


Suitable tapes: Double sided butyl, plastic or foil faced self-adhesive tapes can be used.

Storage: Store rolls vertical in a clean, dry area - protected from flame sources.

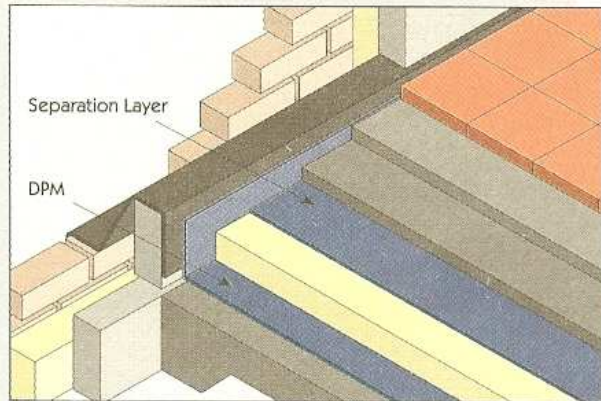


1. DPM

- Lay black side down over smooth surface (rough surfaces should be sand blinded to avoid puncture).
- Allow 150mm overlaps and seal with tape.

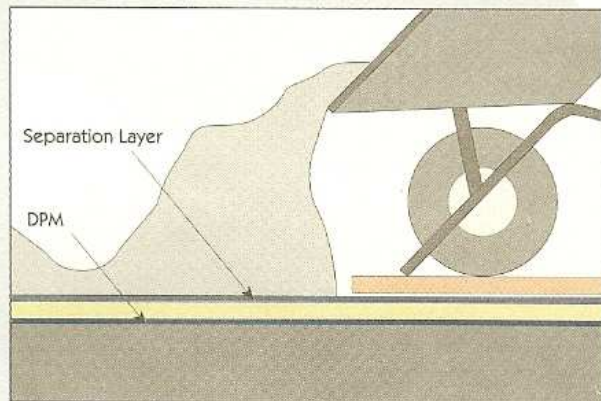

2. Concrete Slide/Separation Layer

- Lay black side up, allow 100mm overlaps.

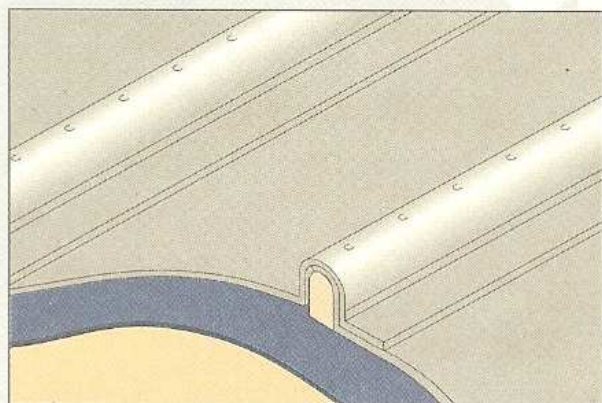

3. Lead roof underlay

- Lay black up using nails or staples, allowing 150mm overlaps.
- Also use under lead in valley gutters.



for further information call
A. Proctor Group:
01250 872261

A. Proctor Group.
The Haugh, Blairgowrie,
Perthshire, PH10 7ER

Manufactured by:

BSK

a part of DSSmith Plastics

Batch Number



Certificate No:
FM09889



ASSOCIATION FOR
ENVIRONMENTAL FRIENDLY
BUILDING